
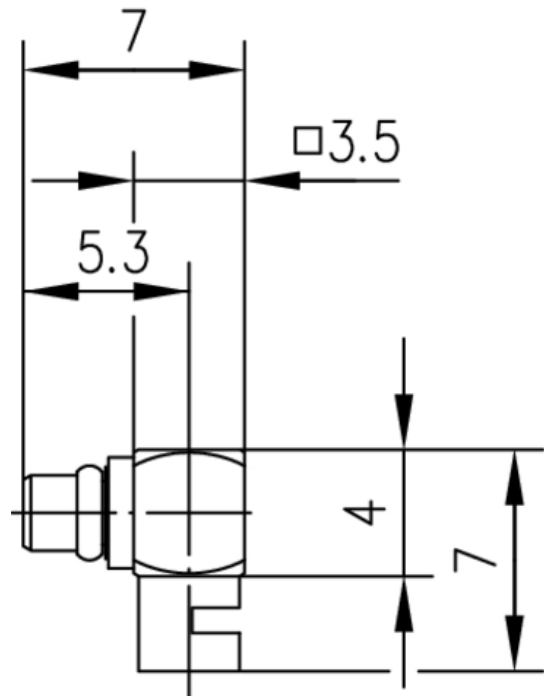


order number: J01340A0021

MMCX Angle Plug G11 (UT-85) solder/solder

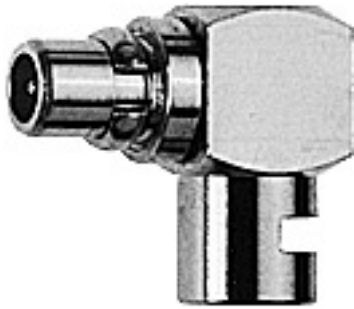

Technical Attributes	
Cable group; cable	G11 (UT-85) 1671A EZ 86 RG-405/U UT-85 SUCOFORM 86 Flexiform 405
Remarks	solder/solder
Assembly	C21

Product description

The MMCX series of micro-miniature connectors is a smaller version of the MCX and also utilizes a snap coupling. They are suitable for use up to 6 GHz. The impedance is controlled at 50 Ω. Connector designs are available for flexible, conformable and semi-rigid cables. Styles are available for mounting to printed circuit boards using thru-hole soldering, press-fit and surface mount technology (SMT). Solder and crimp techniques are used to terminate this series to cables. Because of their small size, these connectors can be used in the

smallest of instruments as well as personal communication equipment.

Mechanical Characteristics	
Durability (mating cycles)	≥ 500
Insertion force	≤ 18 N
Disengagement	6 - 18 N
Material: spring contacts	CuBe2
Material: outer conductor	CuZn39Pb3
Material: other metal parts	CuZn39Pb3
Material: insulators	PTFE
Finish: Inner conductor	Ni2Au1.27
Finish: Outer conductor	Ni2Au0.8
Finish: Other metal parts	Ni5Au0.2

Climatic Characteristics	
Climatic category acc. to IEC 60068 - 1	55/155/21

Electrical Characteristics	
Contact resistance inner conductor	≤ 5 mΩ
Contact resistance outer conductor	≤ 2.5 mΩ
Insulation resistance	≥ 1 GΩ
Impedance	50 Ω
Return loss: Straight style	≥ 20 dB/6 GHz
Return loss: Angle style	≥ 16.5 dB/6 GHz
Proof voltage	500 V/50 Hz
Working voltage	170 V _{eff} /50 Hz
Frequency range up to	6 GHz

Standards	
EN 122340	