

221 Series Compact Lever Connectors

Quick, simple & re-usable



The WAGO 221 Series compact lever connector allows fast wiring for solid, stranded & flexible conductors safely due to CAGE CLAMP® connection.

- CAGE CLAMP® connection, Re-usable
- Up to 4mm², 32A rating, 2, 3 & 5 conductor
- Continuous service temp: max 105°C
- Suitable for all wire types
- 100% Transparent housing

Suitable applications:-

- Lighting
 - Power
 - HVAC
- & many more


**40%
SMALLER**




221 Series Compact Lever Connectors

Technical Data


0.2 - 4mm² "s+st"
0.14 - 4mm² "f-st"
450V/4 kV/2
32A

 11mm "s" solid "st" stranded
"f-st" fine stranded


Dimensions (mm)



221-412
2-conductor



221-413
3-conductor



221-415
5-conductor

Operating



1. Strip the conductor
11mm.



2. Open clamping unit using
the lever and insert the
conductor.



3. Lower the lever to close
the clamp to complete the
connection. 4. To remove, lift
the lever and pull out the
conductor.



Easy testing, test point
on the back (please see
below) and front of
the housing.


Advantages



Industry's widest range of wire sizes

Combine any type and size of wires


- 0.2 - 4mm² Solid & Stranded
- 0.14 - 4mm² Flexible

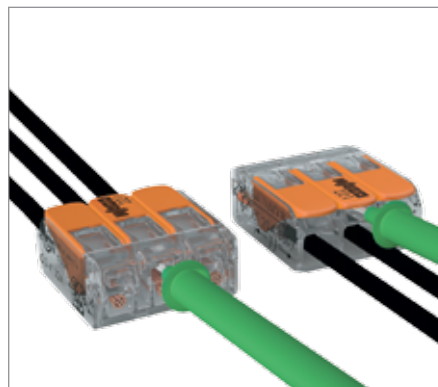

Two test slots

Front and back of the housing.

- Easy testing while installed

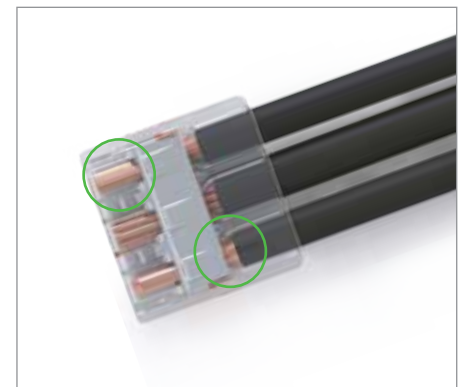

100% Transparent Housing

Safety check

- Wire inserted properly
- Insulation stripped properly

For further information on the 221 Series please visit
www.wago221.com or contact us.