

# 671 RS series



## features



- Ø25.4mm mounting
- Black anodised aluminium housing
- RIA 12 approved versions available
- Colour diffused lens
- Sealed to IP67
- Large LED indication
- AC versions available
- Pack Quantity = 1 Piece

## specifications

Typical characteristics (Ta = 25°C)

RS Part Number	Marl Part Number	Colour	Voltage Vac/dc	Current DC (mA)	Luminous Intensity (mcd)	Wave Length (nm)	Operating Temp. (°C)	Storage Temp. (°C)	De-rating Graphs
2969529	671-289-22	Red	24 Vdc	17	250	660	-40 - +85	-40 - +85	A
2969614	671-289-76	Red	230 Vac	16	250	660	-40 - +85	-40 - +85	A
2969535	671-290-22	Red	24 Vdc	17	68.2	627	-40 - +85	-40 - +85	A
2969579	671-290-75	Red	110 Vac	17	68.2	627	-40 - +85	-40 - +85	A
2969620	671-290-76	Red	230 Vac	16	68.2	627	-40 - +85	-40 - +85	A
2969557	671-291-22	Yellow	24 Vdc	19	68.2	590	-40 - +85	-40 - +85	A
2969608	671-291-75	Yellow	110 Vac	19	68.2	590	-40 - +85	-40 - +85	A
2969658	671-291-76	Yellow	230 Vac	16	68.2	590	-40 - +85	-40 - +85	A
2969541	671-292-22	Green	24 Vdc	21	110	565	-40 - +85	-40 - +85	F
2969591	671-292-75	Green	110 Vac	17	110	565	-40 - +85	-40 - +85	F
2969636	671-292-76	Green	230 Vac	16	110	565	-40 - +85	-40 - +85	F

$\wedge$  = Voltage for 20mA product is Vf at 20mA, not Vopr

- Products must be de-rated according to the de-rating information. Each de-rating graph refers to specific LEDs. Please refer to graphs on page 3.

- Luminous intensity is measured at 20mA on a discrete LED unless otherwise stated.

© marl international limited technical documentation has been designed by marl international limited for the intention of providing information, which must not be copied or released to a third party without prior written consent from marl international limited. the information provided does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. no responsibility can be assumed for inaccuracies or printing errors. marl international limited reserve the right to alter without notice the specification or any conditions of supply for product or service.




BS EN ISO 9001:2008 approved manufacturer

# 671 RS series



## technical data

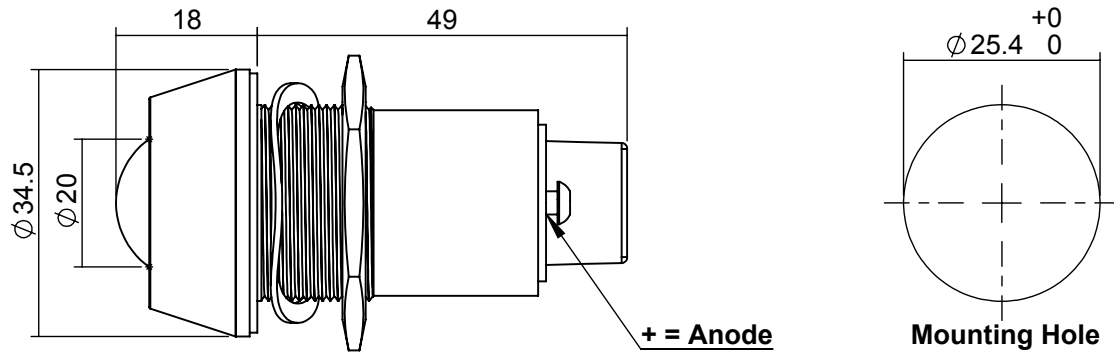

Dimensions in mm (typical)  
Not to scale

Mounting hole to be clean and burr free

## housing material

Body	Black Anodised Aluminium
Nut	Aluminium
Panel Seal	Neoprene
Fresnel Lens	Epoxy
Encapsulation	PC5430 Resin
Lock Washer	Spring Steel
Termination Tags	Zinc Plated Steel
Header	Nylon 6 A82

## technical characteristics

Series	Max. Power Dissipation	Max. Reverse Voltage	Panel Cutout	Nut Mounting Torque	Min. Mounting Centres	Max. Panel Thickness
671	2500	N/A	25.4	1.2	41.0	2.0 - 10.0
<b>units</b>	mW	Vdc	mm	Nm	mm	mm

\* = Current Version

^ = Voltage Version



© marl international limited technical documentation has been designed by marl international limited for the intention of providing information, which must not be copied or released to a third party without prior written consent from marl international limited. the information provided does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. no responsibility can be assumed for inaccuracies or printing errors. marl international limited reserve the right to alter without notice the specification or any conditions of supply for product or service.



# 671 RS series



## de-rating information

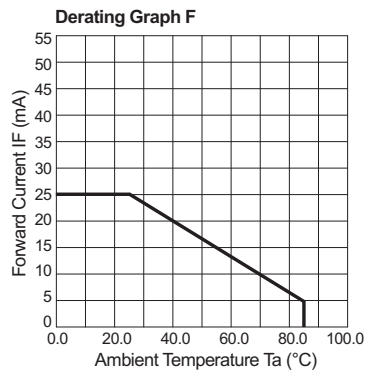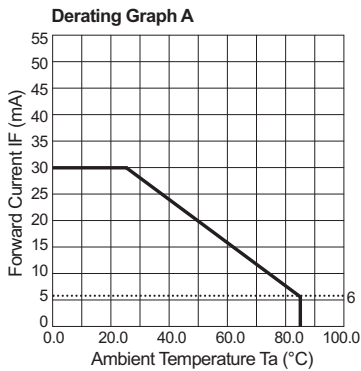

## also available

Part numbers also available in the 671 series:

Part Number	Colour	Voltage Vopr
671-063-62-50	White	48-130Vac/dc
671-063-91-50	White	230 Vac/dc
671-063-98-50	White	24 Vac/dc
671-289-75	Red	110 Vac 50 Hz
671-289-87-50	Red	130 Vac/dc
671-290-26	Red	230 Vdc
671-290-75-50	Red	110 Vac 50 Hz
671-290-91	Red	230 Vac/dc
671-290-91-50	Red	230 Vac/dc
671-291-99	Yellow	110 Vac/dc
671-292-00-50	Green	120 Vac
671-292-87-50	Green	130 Vac/dc
671-293-75	Yellow	110 Vac 50 Hz
671-293-87-50	Yellow	130 Vac/dc
671-294-87-50	Blue	130 Vac/dc

The products listed here illustrate all of the options available to order. These products may have custom modifications that alter their operation beyond the generic information contained within this datasheet. Please contact sales for further information.

\* = These products do not contain integral resistors

© marl international limited technical documentation has been designed by marl international limited for the intention of providing information, which must not be copied or released to a third party without prior written consent from marl international limited. the information provided does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. no responsibility can be assumed for inaccuracies or printing errors. marl international limited reserve the right to alter without notice the specification or any conditions of supply for product or service.



# 671 RS series



## design considerations

### Electro-Static Discharge (ESD)

Build up of electro-static discharge occurs in many situations involving people moving and handling products. The range of possible situations is very diverse but voltage levels as high as several thousand volts can and do arise in many individual situations. When an operator charged up to these levels handles a static sensitive device, there is a very probable likelihood that the device will be irreversibly damaged. It is essential that precautions are taken at all stages during manufacture and assembly of these products. Although LEDs were never considered to be static sensitive devices, changes in manufacturing technology and materials used to produce higher intensity products over a large range of the wavelength spectrum have changed this. Marl has an approved system of ESD control from goods in, through production and into final packing and despatch. Marl recommend all users of LED based products follow the guidelines of BS 100015.

### Power De-Rating

The forward voltage/ current value of an LED is dependant upon the ambient temperature of the environment in which it is operated. Therefore, care must be taken to operate the LED at the correct voltage/ current values, depending upon the ambient temperature. Consequently, a recommendation regarding operating voltages and currents is given in order to address these temperature effects. This recommendation is termed 'de-rating'. It is usual for forward voltages and currents to be specified for ambient temperature of 25°C. However, because the values of these qualities vary with temperature, please refer to the de-rating graphs for correct operation. Marl accept no liability for any product that is operated higher than the stated voltage.

© marl international limited technical documentation has been designed by marl international limited for the intention of providing information, which must not be copied or released to a third party without prior written consent from marl international limited. the information provided does not constitute part of any order or contract and should not be regarded as a representation relating to either products or service. no responsibility can be assumed for inaccuracies or printing errors. marl international limited reserve the right to alter without notice the specification or any conditions of supply for product or service.

